RESPONSIVE

IMPACT

A BETTER FLOOR

TRANQUIL

SPC FLOORING

UNILIN™ CLICK SYSTEM | PAINTED BEVEL

RESPONSIVE

IMPACT
A BETTER FLOOR

TRANQUIL

SPC FLOORING: UNILIN™ CLICK SYSTEM

SIZE: 12” x 24”
THICKNESS: 5.00 MM
WEAR LAYER: 22 MIL | 0.55 MM
TEXTURE: POINT EMBOSS / NATURAL STONE TEXTURE

EDGE FINISH: PAINTED BEVEL
PIECES: 12 PER CARTON
COVERAGE: 23.25 SQ FT / 2.16 M² / CARTON
INTERLOCK: UNILIN™ CLICK SYSTEM

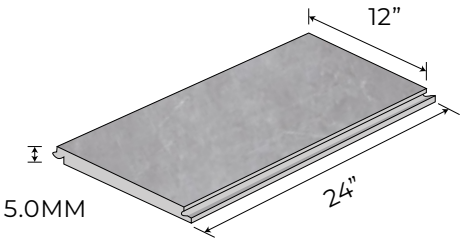

12” x 24” x 5.0 MM
300 mm X 600 mm x 5.0MM

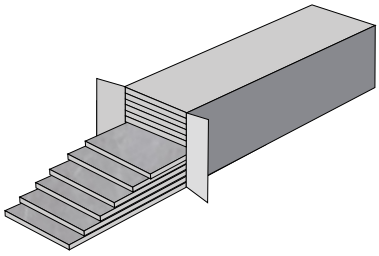

12 PCS/CARTON
23.25 SQ.FT/CARTON
40.48 LBS/CARTON

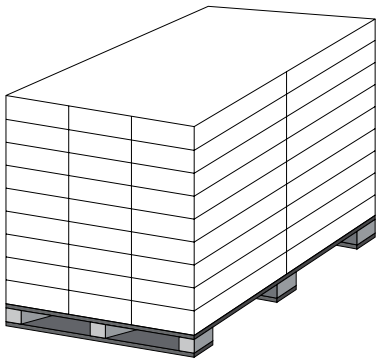

55 CARTONS/PALLET
2186 LBS/PALLET

RESPONSIVE

IMPACT
A BETTER FLOOR

TRANQUIL

SPC FLOORING: UNILIN™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE PUR Polyurethane Reinforcement | Product Standard TRANQUIL ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	TRANQUIL
TYPE OF FLOOR COVERING	ISO 10582	SPC
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC: DOMESTIC 23 | COMMERCIAL 33
TECHNICAL CHARACTERISTICS	**STANDARDS**	**TRANQUIL**
SURFACE TREATMENT	UV TREATED	PUR
TOTAL THICKNESS	EN ISO 2436 (EN 428)	5.0 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	0.55 MM | 22 MIL
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
TOTAL WEIGHT	EN ISO 23997 (EN 430)	8.5 KG/M² | 1.74 LBS / SQ.FT
FORM OF DELIVERY	EN ISO 24342 (EN 427)	12" X 24" = 23.25 SQ.FT | 12 PIECES / CARTON
	CARTONS PER PALLET	54 / PALLET | 2186 LBS / PALLET
	EDGE FINISH	PAINTED BEVEL
TECHNICAL PERFORMANCES	**STANDARDS**	**TRANQUIL**
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	≤ 0.10%
REACTION TO FIRE	EN 13501 – 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	≤ 2MM
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	ΔLNW = 18 DB
LIGHT FASTNESS	EN ISO 105 – B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE
SLIP RESISTANCE	DIN51130 | EN 13893	R9 | CLASS DS
STAIN RESISTANCE	EN 438-2	RATING 5, NO CHANGE

floor score
CERTIFIED BY SCS Global Services

ISO 9001
ISO 14001
ISO 18001

25 YEARS
LIMITED RESIDENTIAL WARRANTY

10 YEARS
LIGHT COMMERCIAL WARRANTY

RQ PROTECT
MEDICAL GRADE SURFACE FINISH



CE
EN 14041

© All contents of this Technical Data Sheet are of the copyright of Responsive Industries Limited. Any duplication in any form without prior permission is strictly prohibited.
The above data is also valid at the time of print. For more details regarding the technical specifications, handling and installation, please contact Responsive Industries Limited.

RESPONSIVE

IMPACT
A BETTER FLOOR

TRANQUIL

SPC FLOORING: UNILIN™ CLICK SYSTEM

UV SURFACE TREATMENT: Thickness In Microns
- Super Stain And Scratch Resistant
- Completely Waterproof
- No Bugs No Termites

TRANSPARENT WEAR LAYER: 0.55 mm
- Enhances The Colour And Emboss
- Protects From Abrasion

OVER ALL THICKNESS: 5.0 mm

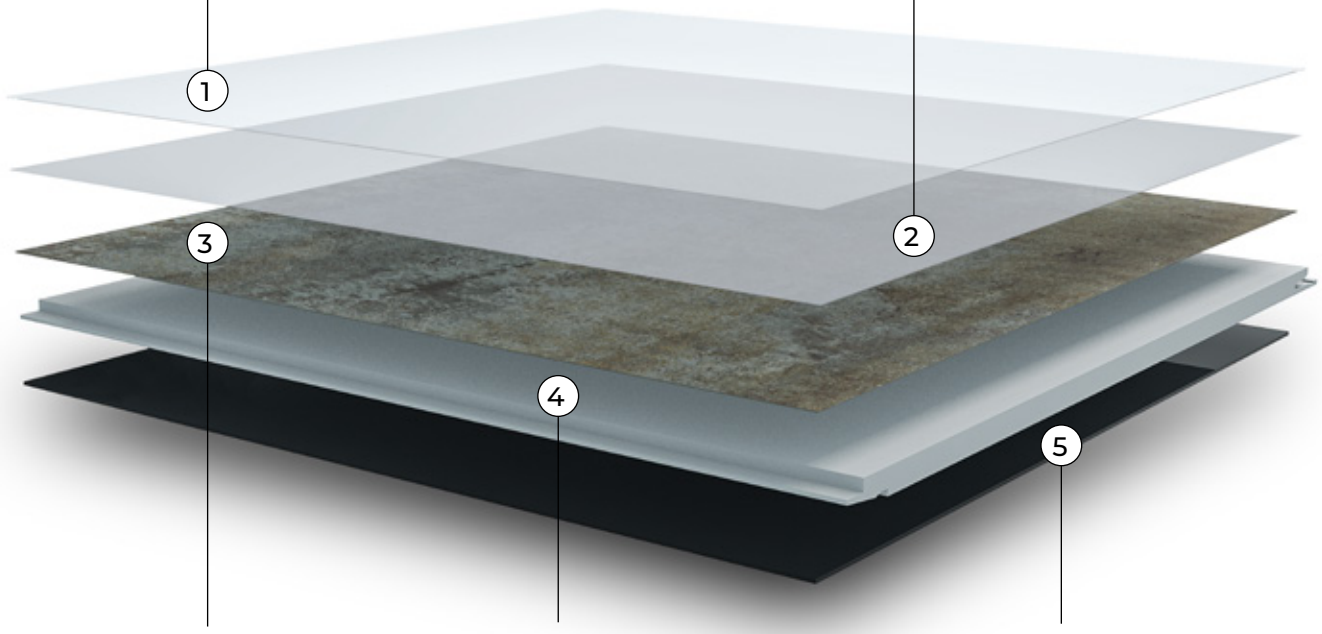

FILM LAYER: 0.10 mm
- Stunning Stone Designs
- Natural Looking, Natural Feeling

RIGID CORE: 3.35 mm
- Sturdy Construction
- Dimensional Stability
- UNILIN™ Click System
- Quick And Easy Installation

IXPE Backing: 1.00 mm
- 1mm IXPE Backing With Good Grip
- Insulates Sound
- Provides Underfoot Comfort

FEATURES & BENEFITS

- 100% Waterproof
- No Adhesive Required
- Easy Clean
- Superior Scratch & Stain Resistant
- Natural Looking Design
- Zero Maintenance
- Superb Dimensional Stability
- Excellent Sound Insulation

APPLICATIONS

- Corporate Offices
- Residential
- Retail
- Hospitality

CLOUD

IMP-TRQ-13

RESPONSIVE

IMPACT
A BETTER FLOOR

CLOUD

IMP-TRQ-13

RESPONSIVE

IMPACT
A BETTER FLOOR

CLOUD

IMP-TRQ-13

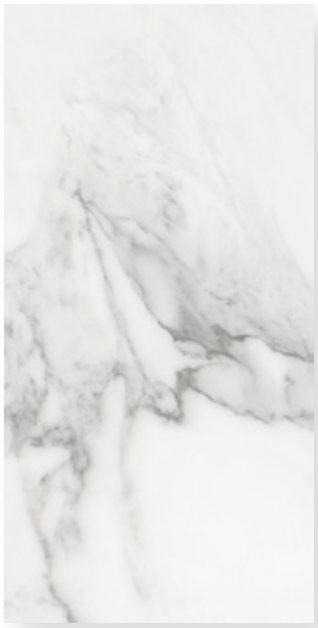

A

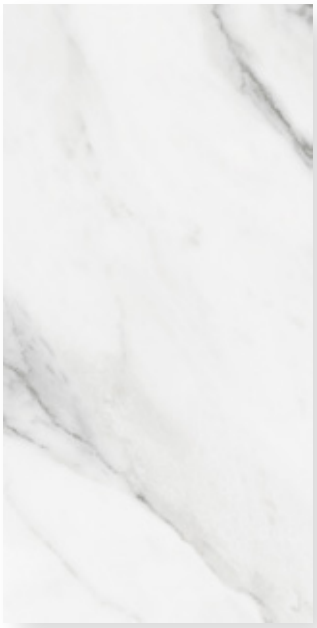

B

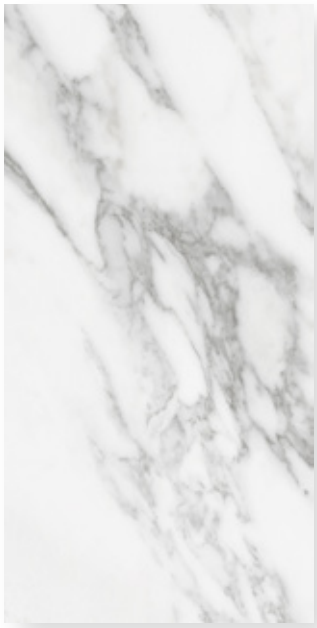

C

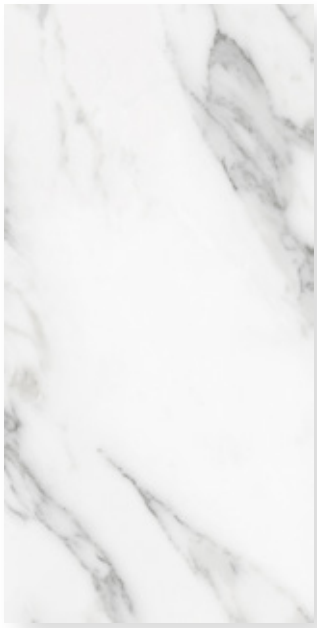

D

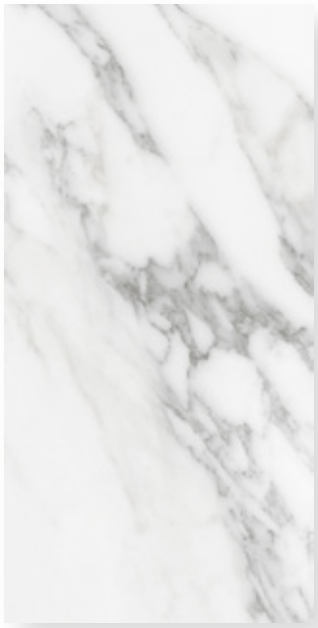

E

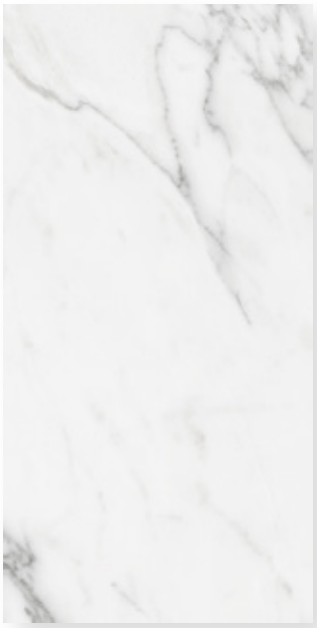

F

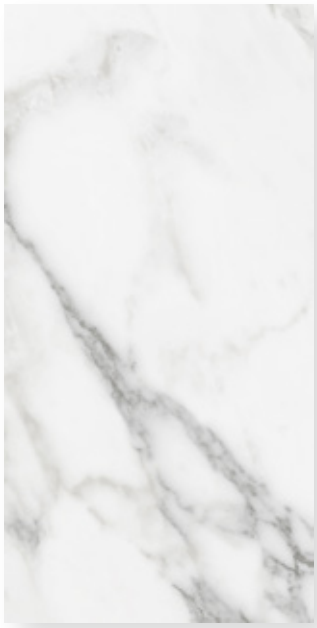

G

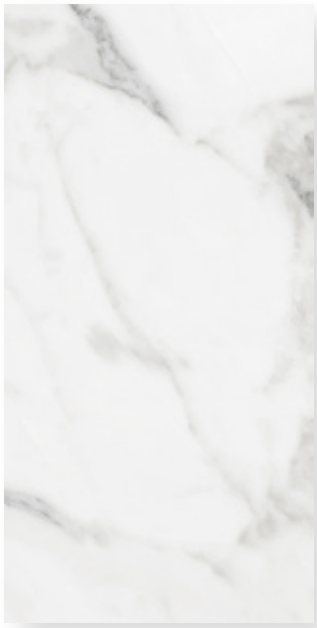

H

RIVER

IMP-TRQ-14

RESPONSIVE

IMPACT
A BETTER FLOOR

RIVER

IMP-TRQ-14

RESPONSIVE

IMPACT
A BETTER FLOOR

RIVER

IMP-TRQ-14

A

B

C

D

E

F

BEACH

IMP-TRQ-15

RESPONSIVE

IMPACT
A BETTER FLOOR

BEACH

IMP-TRQ-15

RESPONSIVE

IMPACT
A BETTER FLOOR

BEACH

IMP-TRQ-15

A

B

C

D

E

F

RAIN

IMP-TRQ-16

RESPONSIVE

IMPACT
A BETTER FLOOR

RAIN

IMP-TRQ-16

RESPONSIVE

IMPACT
A BETTER FLOOR

RAIN

IMP-TRQ-16

A

B

C

D

E

F