

RESPONSIVE 

IMPACT

A BETTER FLOOR

ALLURING

SPC FLOORING



UNILIN™ CLICK SYSTEM

RESPONSIVE 

IMPACT
A BETTER FLOOR

A BETTER
FLOOR

PLANK SIZE: 7" x 48" x 5.50 mm

IMPACT ALLURING

SPC FLOORING

SIZE: 7" x 48"

EDGE FINISH: MICRO BEVEL

THICKNESS: 5.50 MM

WEAR LAYER: 22 MIL | 0.55 MM

PIECES: 9 PER BOX

COVERAGE: 21.02 SQ FT | 1.95 M² / CARTON

INTERLOCK: UNILIN CLICK SYSTEM

IMPACT ALLURING

SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR Polyurethane Reinforcement | Product Standard ASTM F3261

CERTIFICATION & CLASSIFICATION	STANDARD	IMPACT ALLURING
TYPE OF FLOOR COVERING	ASTM F3261 EN 16511	RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC)
CE CERTIFICATION	EN 14041	YES
CLASSIFICATION	EN ISO 10874	HEAVY TRAFFIC: DOMESTIC 23 COMMERCIAL 33

TECHNICAL CHARACTERISTICS	STANDARDS	IMPACT ALLURING
TOTAL THICKNESS	EN ISO 24336 (EN 428)	5.50 MM
WEAR LAYER THICKNESS	EN ISO 24340 (EN 429)	22 MIL WL 0.55 MM
SURFACE TREATMENT	UV TREATED	PUR
TOTAL WEIGHT	EN ISO 23997 (EN 430)	1.72 LBS / SQ FT = 8.40 KG / m ²
WEAR LAYER BINDER CONTENT	ISO 10582	TYPE I
FORM OF DELIVERY	EN ISO 24342 (EN 427) PLANKS IN CARTON	7" X 48" = 21.02 SF / CARTON
		178 mm X 1219 mm = 1.95 m ² / CARTON
	PIECES	9 PIECES PER CARTON
	EDGE FINISH	MICRO BEVEL

TECHNICAL PERFORMANCES	STANDARDS	IMPACT ALLURING
DIMENSIONAL STABILITY	EN ISO 23999 (EN 434)	< 0.10%
REACTION TO FIRE	EN 13501 – 1	BFL- S1
RESIDUAL INDENTATION	EN ISO 24343-1 (EN 433)	PASS
FURNITURE LEG	EN 424	NO DAMAGE
CASTOR CHAIR	EN ISO 4918 (EN 425)	NO DAMAGE
CURL RESULTANT TO HEAT	EN ISO 23999 (434)	< 2MM PASS
IMPACT SOUND REDUCTION	EN ISO 140-8 EN ISO 717/2	Δ LNW = 21 DB
LIGHT FASTNESS	EN ISO 105 – B02	> GRADE 6
RESISTANCE TO CHEMICALS	EN ISO 26987 (EN423)	GOOD RESISTANCE PASS
SLIP RESISTANCE	DIN51130 EN 13893	R9 CLASS DS
STATIC LOAD	ASTM F970	PASS



ISO 9001
ISO 14001
ISO 18001



LIMITED RESIDENTIAL WARRANTY



LIGHT COMMERCIAL WARRANTY




EN 14041







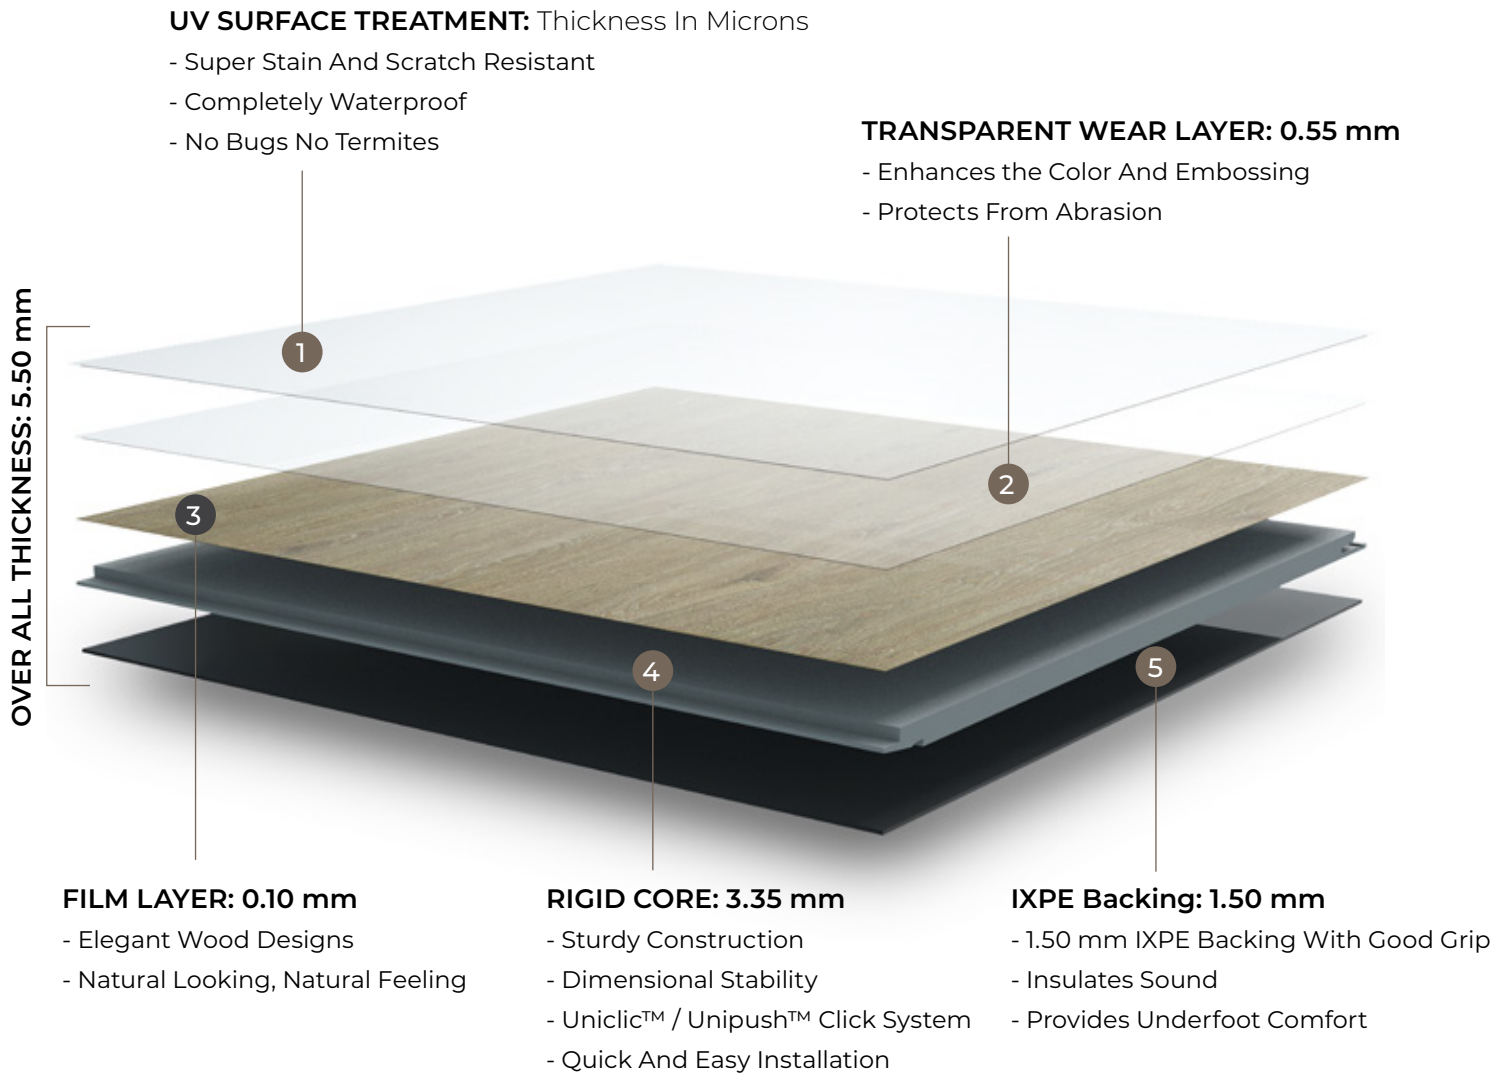







IMPACT ALLURING





SPC FLOORING: UNICLIC / UNIPUSH™ CLICK SYSTEM



FEATURES & BENEFITS

 Superior Scratch & Stain Resistant	 No Bugs & Termites	 Click Installation No Adhesive	 100% Waterproof	 Easy Clean	 Multiple Color Combinations
 Natural Looking Design	 Zero Maintenance	 Superb Dimensional Stability	 Endures Medium Foot Traffic	 Excellent Sound Insulation	 No Sub-Floor Required

APPLICATIONS

 Corporate Offices	 Residential
 Retail	 Hospitality

HICKORY KNOB

ALL 11

HICKORY KNOB

ALL 11



HICKORY KNOB

ALL 11

A



B



C



D



E



F



G



H



I



J



CEDAR FALLS

ALL 12

CEDAR FALLS

ALL 12



CEDAR FALLS

ALL 12

A



B



C




D




E



F

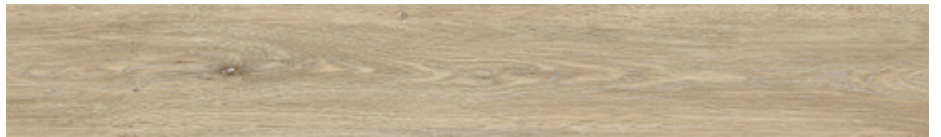

G



H



I



J



SADDLERS CREEK

ALL 13

RESPONSIVE 

IMPACT
A BETTER FLOOR

SADDLERS CREEK

ALL 13



SADDLERS CREEK

ALL 13


A



B



C



D



E




F




G




H



I



J

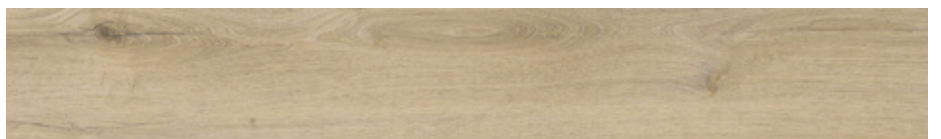

COTTONWOOD TRAIL

ALL 14

COTTONWOOD TRAIL

ALL 14



RESPONSIVE 

IMPACT
A BETTER FLOOR

COTTONWOOD TRAIL

ALL 14


A



B



C

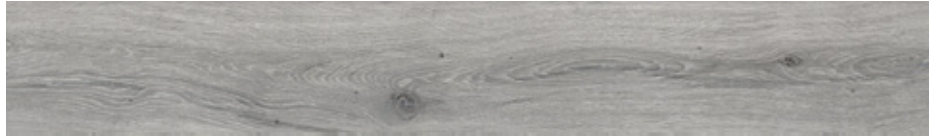

D



E



F



G



H



I



J



SPRING GROVE

ALL 15

SPRING GROVE

ALL 15



SPRING GROVE

ALL 15

A



B



C



D




E




F



G




H



I



J

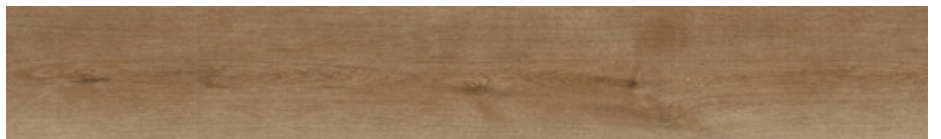

WHITE RIVER HICKORY

ALL 16

WHITE RIVER HICKORY

ALL 16



WHITE RIVER HICKORY

ALL 16

A



B




C



D



E

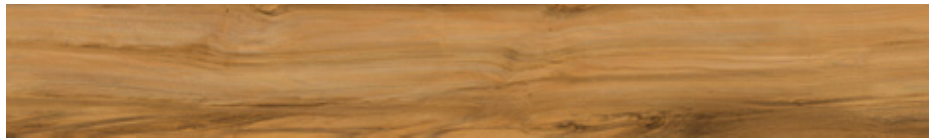

F



G



H



I



J



MUSGROVE MILL

ALL 17

RESPONSIVE 

IMPACT
A BETTER FLOOR

MUSGROVE MILL

ALL 17



MUSGROVE MILL

ALL 17

A



B



C




D




E



F

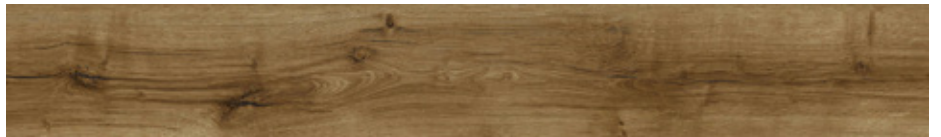

G



H



I



J



LIBERTY BRIDGE

ALL 18

RESPONSIVE 

IMPACT
A BETTER FLOOR

LIBERTY BRIDGE

ALL 18



LIBERTY BRIDGE

ALL 18

A




B



C




D

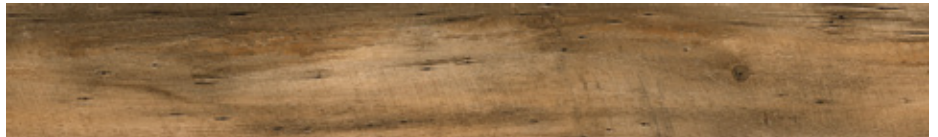

E



F

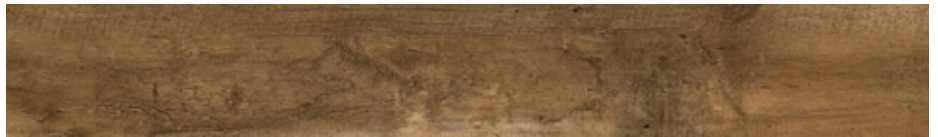


G



H



I

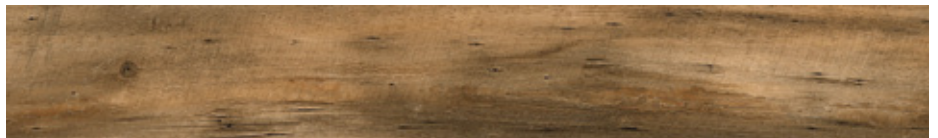

J

