

RESPONSIVE 

IMPACT

A BETTER FLOOR

Artisan Edge
SPC FLOORING



UNILIN™ CLICK SYSTEM | ROLLED BEVEL

Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT



SIZE: 7" x 60"

THICKNESS: 6.50 MM

WEAR LAYER: 22 MIL | 0.55 MM


TEXTURE: BP EMBOSS

EDGE FINISH: ROLLED BEVEL

PIECES: 8 PER CARTON

COVERAGE: 23.62 SQ FT / 2.19 M² / CARTON

INTERLOCK: UNILIN™ CLICK SYSTEM

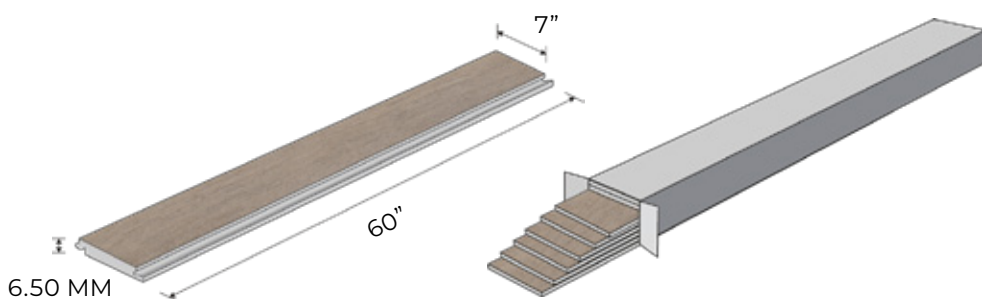

6.50 MM


7" x 60" x 6.5 MM

180 mm X 1524 mm x 6.5 MM

8 PCS/CARTON

23.62 SQ.FT/CARTON

51.28 LBS/CARTON

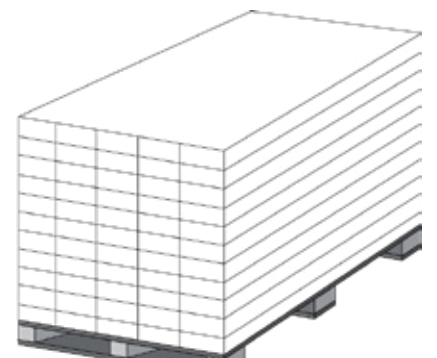

40 CARTONS/PALLET

50.69 LBS/CARTON

2027.6 LBS/PALLET

Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

SPC FLOORING FOR HEAVY COMMERCIAL USE | PUR POLYURETHANE REINFORCEMENT | PRODUCT STANDARD ARTISAN EDGE ASTM F3261

| CERTIFICATION & CLASSIFICATION | STANDARD | ARTISAN EDGE |
|--------------------------------|---|--|
| TYPE OF FLOOR COVERING | ASTM F3261 EN 16511 | RESILIENT FLOORING IN MODULAR FORMAT WITH RIGID CORE (SPC) |
| CE CERTIFICATION | EN 14041 | YES |
| CLASSIFICATION | EN ISO 10874 | HEAVY TRAFFIC: DOMESTIC 23 COMMERCIAL 33 |
| TECHNICAL CHARACTERISTICS | STANDARDS | ARTISAN EDGE |
| TOTAL THICKNESS | EN ISO 24336 (EN 428) | 6.50 MM |
| WEAR LAYER THICKNESS | EN ISO 24340 (EN 429) | 22 MIL WL 0.55 MM |
| SURFACE TREATMENT | UV TREATED | RQ PROTECT |
| TOTAL WEIGHT | EN ISO 23997 (EN 430) | 51.28 LBS/CARTON = 23.26 KG/CARTON 2051 LBS/PALLET = 930.38 KG/PALLET |
| WEAR LAYER BINDER CONTENT | ISO 10582 | TYPE I |
| FORM OF DELIVERY | EN ISO 24342 (EN 427) PLANKS IN CARTON | 7" X 60" = 23.62 SF/CARTON 180 mm X 1524 mm = 2.19 M ² /CARTON |
| | PIECES | 8 PIECES PER CARTON |
| | CARTONS | 40 CARTONS / PALLET |
| | EDGE FINISH | ROLLED BEVEL |
| TECHNICAL PERFORMANCES | STANDARDS | ARTISAN EDGE |
| DIMENSIONAL STABILITY | EN ISO 23999 (EN 434) | < 0.10% |
| REACTION TO FIRE | EN 13501 - 1 | BFL- S1 |
| RESIDUAL INDENTATION | EN ISO 24343-1 (EN 433) | PASS |
| FURNITURE LEG | EN 424 | NO DAMAGE |
| CASTOR CHAIR | EN ISO 4918 (EN 425) | NO DAMAGE |
| CURL RESULTANT TO HEAT | EN ISO 23999 (434) | < 2MM PASS |
| IMPACT SOUND REDUCTION | EN ISO 140-8 EN ISO 717/2 | Δ LNW = 21 DB |
| LIGHT FASTNESS | EN ISO 105 - B02 | > GRADE 6 |
| RESISTANCE TO CHEMICALS | EN ISO 26987 (EN423) | GOOD RESISTANCE PASS |
| SLIP RESISTANCE | DIN51130 EN 13893 | R9 CLASS DS |
| STATIC LOAD | ASTM F970 | PASS |



ISO 9001
ISO 14001
ISO 18001



LIMITED RESIDENTIAL WARRANTY



LIGHT COMMERCIAL WARRANTY




EN 14041



Artisan Edge

• WATERPROOF • SCUFF & SCRATCH RESISTANT • FADE RESISTANT • STAIN RESISTANT

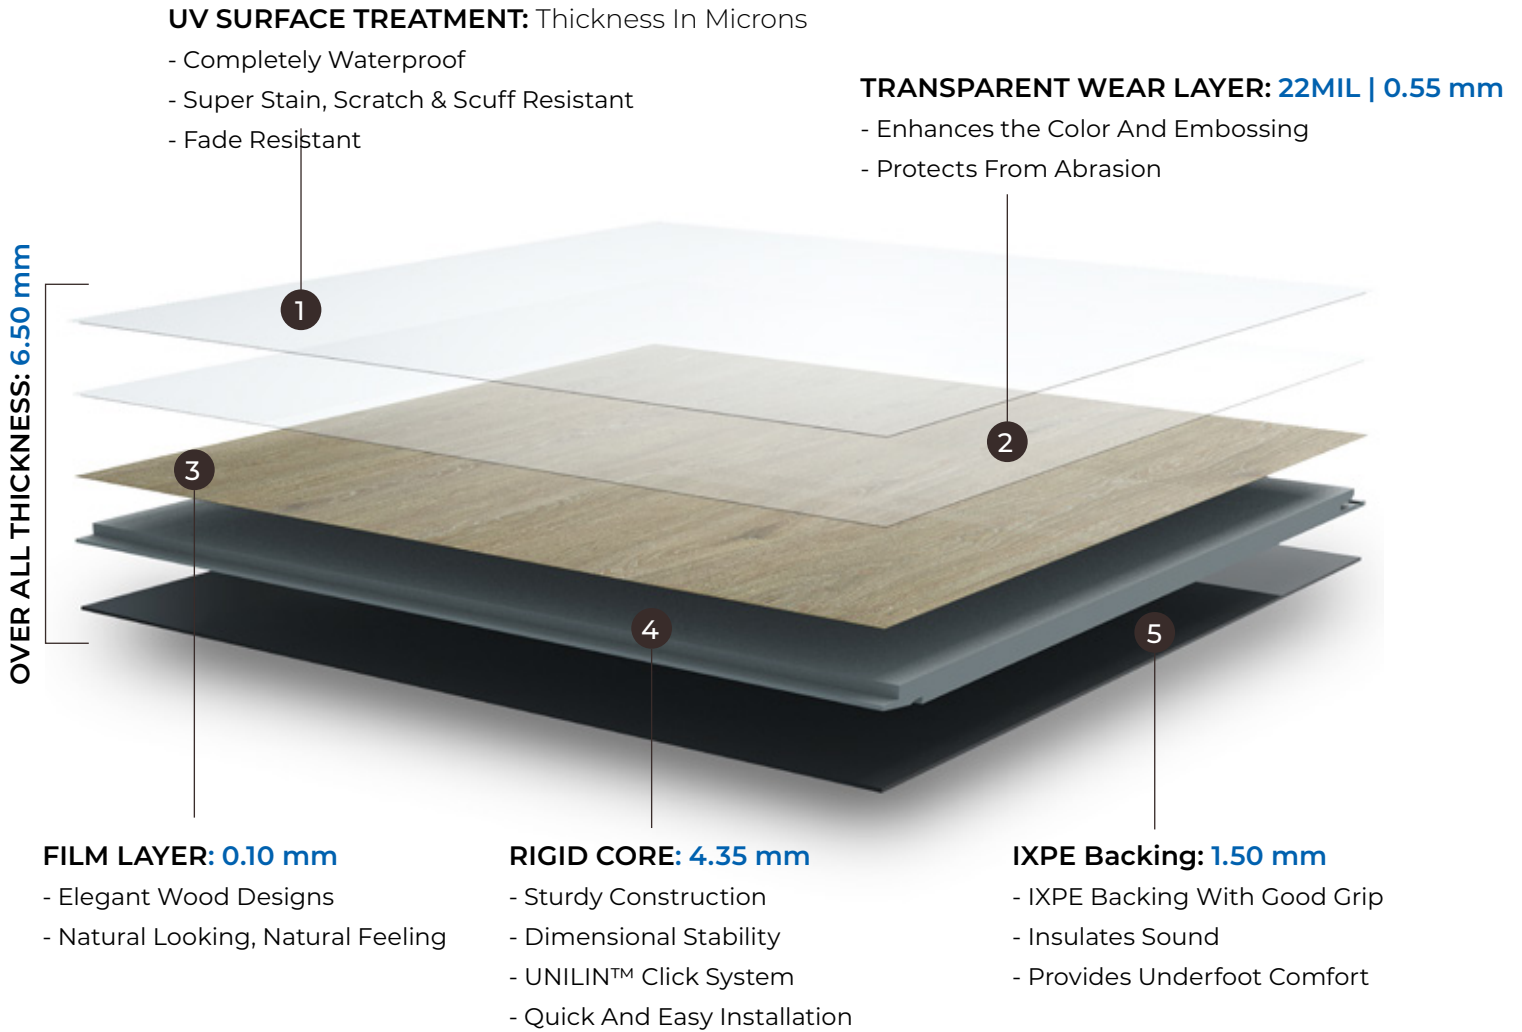

FEATURES & BENEFITS

APPLICATIONS



100%
Waterproof



Click Installation
No Adhesive



Superior Scratch
& Stain Resistant



No Sub-Floor
Required



Easy
Clean



Corporate
Offices



Residential



Natural Looking
Design



Zero
Maintenance



Superb
Dimensional
Stability



Endures
Medium
Foot Traffic



Excellent
Sound
Insulation



Retail



Hospitality

AURORA

ART-101

RESPONSIVE 

IMPACT
A BETTER FLOOR

AURORA

ART-101

RESPONSIVE



A B C D E



ORION
ART-102

RESPONSIVE 

IMPACT
A BETTER FLOOR

ORION ART-102

RESPONSIVE



A B C D E



SERENE

ART-103

RESPONSIVE 

IMPACT
A BETTER FLOOR

SERENE
ART-103



A B C D E



SIERRA
ART-104

RESPONSIVE 

IMPACT
A BETTER FLOOR

SIERRA

ART-104

RESPONSIVE



A B C D E



CASPIAN

ART-105

RESPONSIVE 

IMPACT
A BETTER FLOOR

CASPIAN
ART-105

RESPONSIVE



A B C D E



CELESTE
ART-106

RESPONSIVE 

IMPACT
A BETTER FLOOR

CELESTE ART-106

RESPONSIVE



A B C D E



MONET
ART-107

RESPONSIVE 

IMPACT
A BETTER FLOOR

MONET
ART-107

RESPONSIVE



A B C D E



ARTEMIS

ART-108

RESPONSIVE 

IMPACT
A BETTER FLOOR

ARTEMIS

ART-108



A

B

C

D

E

