

**IMPACT**  
A BETTER FLOOR



LUXURY VINYL TILE

**CAPTIVATE**

3.0 MM

**RESPONSIVE** 

# CAPTIVATE

LUXURY VINYL TILE

RESPONSIVE



**SIZE:** 8.98" x 60"


**THICKNESS:** 3.0 MM

**WEAR LAYER:** 22 MIL | 0.55 MM


**PIECES:** 12 PER CARTON

**COVERAGE:** 44.88 SQ FT / 4.17 M<sup>2</sup> / CARTON


**INSTALLATION:** GLUE DOWN, DRY BACK LVT

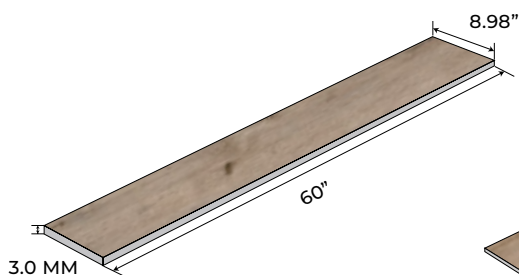

8.98" x 60" x 3 mm  
228.00 mm x 1524mm x 3 mm  
22 MIL / 0.55 mm

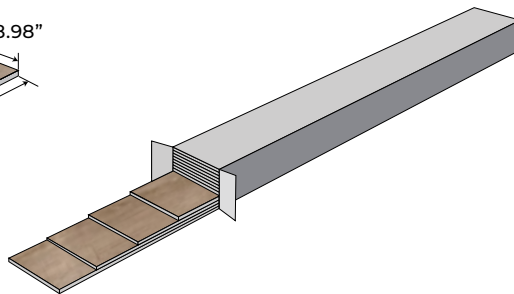

12 PCS / CARTON  
44.88 SQ.FT / CARTON  
4.17 SQ.M / CARTON

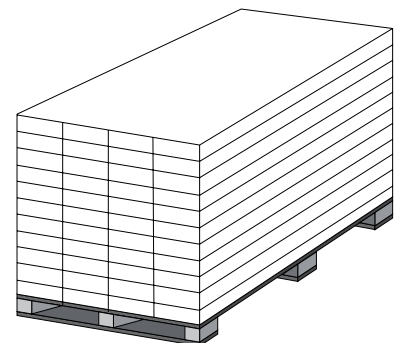

44 CARTONS / PALLET

# CAPTIVATE

## LUXURY VINYL TILE



LUXURY VINYL TILES FOR HEAVY COMMERCIAL | PUR POLYURETHANE REINFORCEMENT | PRODUCT STANDARD: ISO 10582

| CERTIFICATION & CLASSIFICATION | STANDARDS                            | CAPTIVATE                                                                                               |
|--------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| TYPE OF FLOOR COVERING         | ISO 10582                            | LUXURY VINYL TILE                                                                                       |
| CE CERTIFICATION               | EN 14041                             | YES                                                                                                     |
| CLASSIFICATION                 | EN ISO 10874                         | 32 / 42                                                                                                 |
| TECHNICAL CHARACTERISTICS      | STANDARDS                            | CAPTIVATE                                                                                               |
| TOTAL THICKNESS                | EN ISO 2436 (EN 428)                 | 3.0 MM                                                                                                  |
| WEAR LAYER THICKNESS           | EN ISO 24340 (EN 429)                | 0.55 MM / 22 MIL                                                                                        |
| SURFACE TREATMENT              | UV TREATED                           | PUR                                                                                                     |
| MASS PER UNIT AREA             | EN ISO 23997 (EN 430)                | 5.2 KG / M <sup>2</sup>                                                                                 |
| WEAR LAYER BINDER CONTENT      | ISO 10582                            | TYPE I                                                                                                  |
| FORM OF DELIVERY               | EN ISO 24342 ( EN 427)<br>PLANKS BOX | 8.98" X 60"   12 PLANKS / CARTON = 44.88 SF<br>228 X 1524 MM   12 PLANKS / CARTON = 4.17 M <sup>2</sup> |
| TECHNICAL PERFORMANCE          | STANDARDS                            | CAPTIVATE                                                                                               |
| DIMENSIONAL STABILITY          | EN ISO 23999 ( EN 434)               | ≤ 0.1%                                                                                                  |
| REACTION TO FIRE               | EN 13501 – 1                         | CLASS <u>B</u> FL- S1                                                                                   |
| RESIDUAL INDENTATION           | EN ISO 24343-1 (EN 433)              | ≤0.05 MM                                                                                                |
| WEAR RESISTANCE                | EN 660-1                             | GROUP T                                                                                                 |
| CASTOR CHAIR                   | EN ISO 4918 (EN 425)                 | NO DAMAGE                                                                                               |
| CURL RESULTANT TO HEAT         | EN ISO 23999 (EN 434)                | ≤ 2 MM                                                                                                  |
| LIGHT FASTNESS                 | EN ISO 105 – B02                     | ≥ 6                                                                                                     |
| RESISTANCE TO STAIN            | EN 438                               | GRADE 5                                                                                                 |
| RESISTANCE TO CHEMICALS        | EN ISO 26987 (EN 423)                | GOOD RESISTANCE                                                                                         |
| SLIP RESISTANCE                | DIN 51130   EN 13893                 | R 10   CLASS DS                                                                                         |
| ELECTRICAL PROPERTIES          | EN 1815   EN 1081                    | <2KV ON CONCRETE   R1 > 1010 Ω                                                                          |
| THERMAL RESISTANCE             | EN ISO 10456                         | 0.07 M2 K/W                                                                                             |



ISO 9001  
ISO 14001  
ISO 18001





LIMITED  
RESIDENTIAL  
WARRANTY




LIGHT  
COMMERCIAL  
WARRANTY



EN 14041




## LAYER DIAGRAM

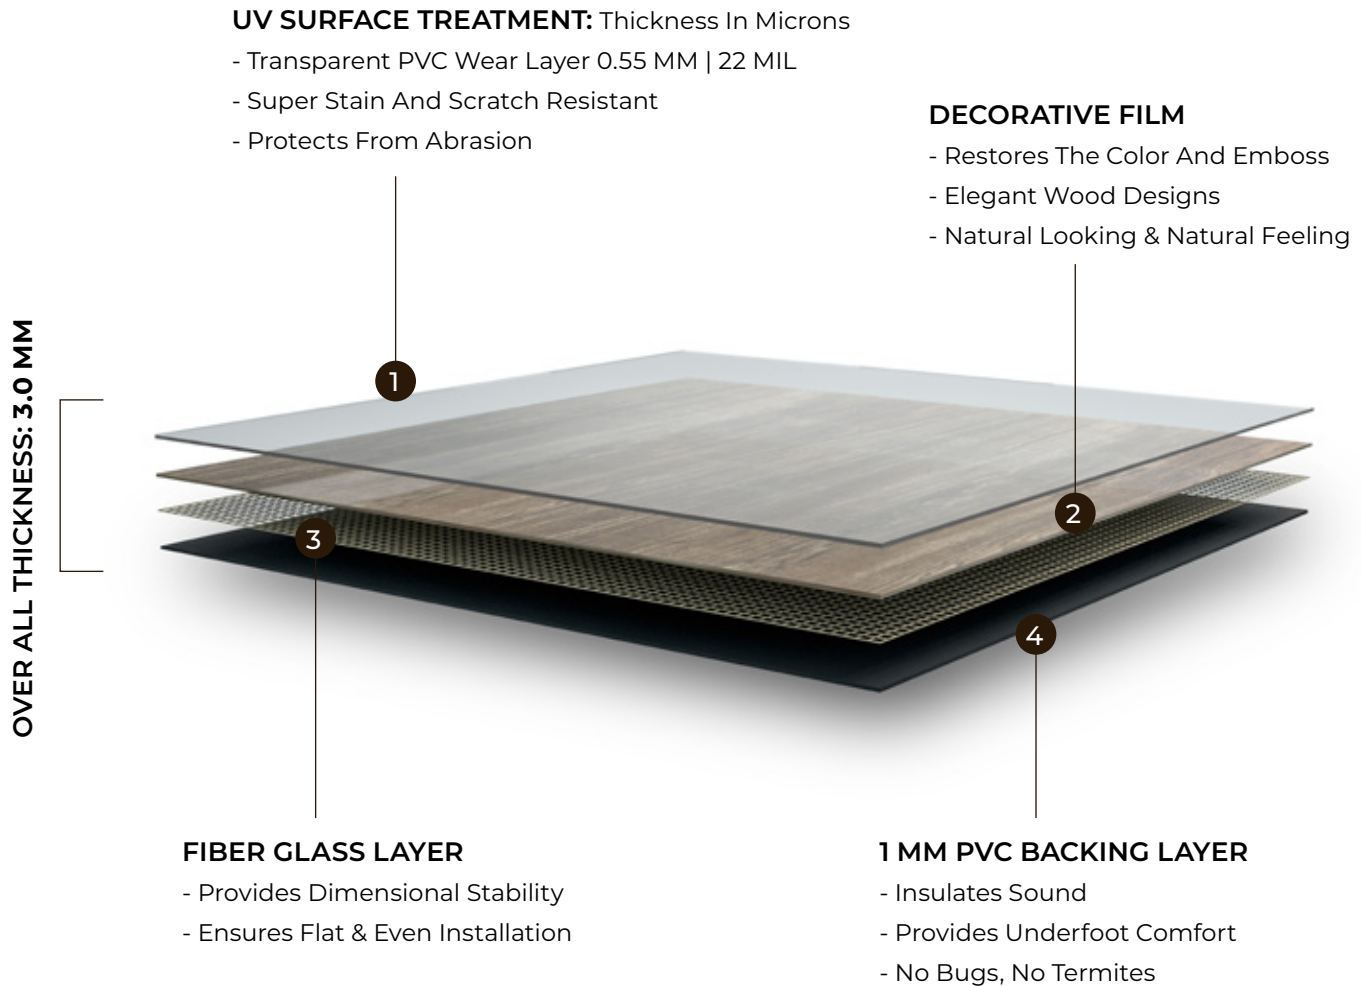

## FEATURES & BENEFITS



## APPLICATIONS



---

**FRISCO**

CAP-FR-301

**RESPONSIVE** 





A



B



C



D



GRAIN DETAIL

---

**BIGHORN**  
CAP-BI-302


**RESPONSIVE** 

**BIGHORN**  
CAP-BI-302

**RESPONSIVE**



A



B



C



D



GRAIN DETAIL

---

**DENALI**  
CAP-DE-303

**RESPONSIVE** 



DENALI  
CAP-DE-303

RESPONSIVE



A



B



C



D



GRAIN DETAIL

---

**WHITNEY**  
CAP-WH-304

**RESPONSIVE** 



WHITNEY  
CAP-WH-304

RESPONSIVE



A



B



C



D



GRAIN DETAIL

---

**ALPINE**

**CAP-AL-305**

**RESPONSIVE** 



ALPINE  
CAP-AL-305

RESPONSIVE




A



B



C



D



GRAIN DETAIL

---

CASCADE  
CAP-CA-306

RESPONSIVE 



CASCADE  
CAP-CA-306

RESPONSIVE



A



B



C



D



GRAIN DETAIL

---

**OLYMPIC**  
CAP-OL-307

**RESPONSIVE** 



OLYMPIC  
CAP-OL-307

RESPONSIVE



A



B



C



D



GRAIN DETAIL

---

**DURANGO**  
CAP-DU-308

**RESPONSIVE** 

DURANGO  
CAP-DU-308

RESPONSIVE 



A



B



C



D



GRAIN DETAIL